


Elektromagnetické rozvaděče 5/2 (PILOTNÍ VENTILY)

Elektromagnetický rozvaděč 5/2, G 1/8"

4V Series Solenoid Valve



Ordering Code


Type Code	Series code	Coil	Joint Size	Standard voltage	Coil Type
4V/5(2/3) Position Valve	1:100 Series 2:200 Series 3:300 Series 4:400 Series	10:Single control 20:Double Control 30C:Double Control 3 Position Center Close 30E:Double Control 3 Position Center Exhaust 30P:Double Control 3 Position Center Pressure	M5-M5 06 G 1/8" 10 G 3/8" 15 G 1/2"	DC12V DC24V AC24V 50/60HZ AC110V 50/60HZ AC220V 50/60HZ AC380V 50/60HZ	Blank DIN Type I: Flying leads

4V Series Solenoid valve

Specifications 4V Series Solenoid Valve (2 Position 5 Port Single Control)

Model	4V110-M5	4V110-06	4V210-06	4V310-08	4V310-10	4V410-15
Working medium	Clean Air (40µm filtration)					
Acting type	Direct Acting					
Joint Size	Import: M5 Export: M5 Exhaust: M5	Import: Export: Exhaust: 1/8		Import: 1/4 Export: 1/4 Exhaust: 1/4	Import: 3/8 Export: 3/8 Exhaust: 1/4	Import: 1/2 Export: 1/2 Exhaust: 1/2
Sectional area	5.5mm ² (CV=0.31)	12mm ² (CV=0.67)	14mm ² (CV=0.78)	16mm ² (CV=0.89)	25mm ² (CV=1.38)	30mm ² (CV=1.67)
Working pressure	0.15~0.8MPa					
Max Pressure	1.2Mpa					
Working Temperature	-5~60°C					
Voltage Range	±15%~10%					
Heat Resistant Grade	B					
Protective Class	IP65(DIN40050)					
Coil Type	DIN Type, Flying leads					
Max Acting Frequency	5 Times/s			4 Times/s		3 Times/s

Main Specifications

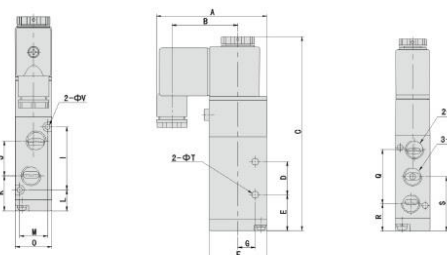

Model	Sign	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y
4V110-M5	55	34	99.4	14	21.2	27	9.5	21.2	30	14	13.2	13	18	28.2	27	14.7	3.3	3.3	M5	M5						
4V110-06	55	34	99.4	14	21.2	27	9.5	20.2	30	16	13.2	13	18	25.2	28	14.2	3.3	3.3	1/8"	1/8"						
4V210-06	66.7	40	117	20	21.7	35	10.5	22.7	38	18	12.7	17	22	31.7	36	13.7	3.2	4.3	1/8"	1/8"						
4V210-08	66.7	40	117	20	21.7	35	10.5	21.2	38	21	12.7	17	22	31.7	36	13.7	3.2	4.3	1/8"	1/4"						
4V310-08	69.2	40	135	24	28	40	13.5	29	50	22	15	20	27	40	45	17.5	4.3	4.3	1/4"	1/4"						
4V310-10	69.2	40	135	24	28	40	13.5	28	50	24	15	20	27	40	45	17.5	4.3	4.3	1/4"	3/8"						
4V410-15	74.2	40	169.4	28	43	50	17.5	39	72	36	21	27	34	57	63	25.5	4.3	5.5	1/2"	1/2"						

Elektromagnetický rozvaděč 5/2, G 1/8", DC24V
4V210_08

IndCom.cz

Elektromagnetické rozvaděče 5/2 (PILOTNÍ VENTILY)
